

ViewSonic® LED DISPLAY

TD1630-3


Key Features

- HD 768p Resolution
- 10-point projected capacitive touch
- HDMI and VGA inputs
- Dual integrated speakers
- Durable, Scratch-resistant Screen



Product Description

The ViewSonic TD1630-3 is a 16" (15.6" viewable) display with 10-point multi-touch functionality. With an advanced ergonomic design, the TD1630-3 can tilt or lay flat to give users maximum comfort. Delivering touchscreen versatility, this display offers fantastic flexibility for retail or business settings, while VGA and HDMI inputs provide ample connectivity. Compatibility with a wide range of operating systems, including Windows 10 and Linux versions*, along with dual integrated speakers, make this intuitive touchscreen a highly accurate, ultra-responsive touch experience that is ideal for interactivity in a retail or business settings. *Supports Windows 7/8/10, Linux Kernel 4.X/3.X

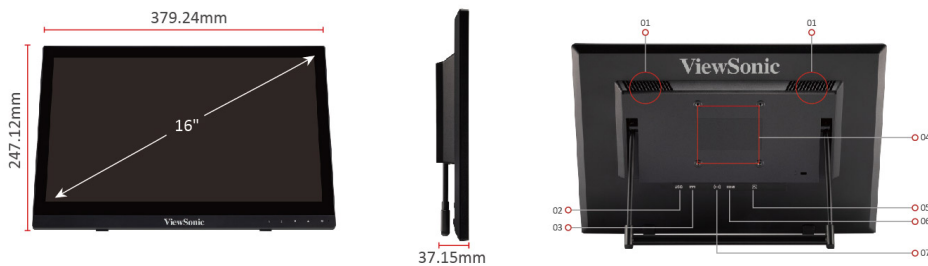

1. Internal Speakers
2. USB
3. DC In
4. VESA Compatible(Wall Mount 75x75mm)
5. VGA
6. HDMI

7. Earphone

Visit Us  www.viewsonic.com

DISPLAY

Monitor Size:	16"W (15.6" Viewable)
Panel Technology:	TN TFT LCD
Resolution:	HD 1366 x 768
Display Area:	344.23mm (H) x 193.54mm (V)
Aspect Ratio:	16:9
Brightness:	220 cd/m2 (Typ) w/o touch module, 190 cd/m2 (Typ) w/ touch module
Contrast Ratio:	500:1 (Typ)
Dynamic Contrast Ratio:	10,000,000:1
Viewing Angles:	90 degrees / 60 degrees (Typ)
Response Time:	12ms
Colours:	262K colours (6-bit)
Colour Gamut:	45% of NTSC (Typ)
Panel Surface:	≥7H, Haze < 2%

INPUT SIGNAL

Frequency:	Fh = 30 ~ 61KHz ; Fv = 56 ~ 75Hz
Sync:	Separate Sync, TMDS

COMPATIBILITY

PC:	Windows 7/8/10 tested
Mac®:	Display: Power Mac tested, Touch Module:iOS not support

CONNECTOR

Input:	VGA x 1 HDMI x 1 (v1.4 compatible) Audio in x1 (3.5mm plug)
--------	---

AUDIO

Speaker:	1W x 2
----------	--------

USB

Upstream:	Type B x 1
-----------	------------

POWER

Power:	5.5 x 2.1 x 11 mm DC connector
Voltage:	AC 100-240V (Universal); 50/60Hz
Consumption:	5.5W
Optimize:	4.9W
Conserve:	4.3W

ERGONOMICS

Tilt:	15 ~ 50 degrees
-------	-----------------

SPECIAL FEATURES

Eye Care:	Blue light filter
-----------	-------------------

WALL MOUNT

VESA®:	75mm x 75mm
--------	-------------

OPERATING CONDITIONS

Temperature (° F / ° C):	32°F to 104°F (0°C to 40°C)
Humidity:	20% to 85% (no condensation)

DIMENSIONS (W X H X D) (MM)

Physical with stand (mm):	379.24mm (W) x 247.12mm (H) x 37.15mm (D) (@0 degree)
Physical without stand (mm):	379.24mm (W) x 247.12mm (H) x 37.15mm (D)
Packaging (mm):	453mm (W) x 389mm (H) x 86mm (D)

WEIGHT

Net with stand:	1.32kg
Net without stand:	1.32kg
Gross:	2.5kg

REGULATIONS

VSI:	RCM, GEMS, BIS
------	----------------

WARRANTY

*Warranty offered may differ from market to market
--

PACKAGE CONTENTS

LCD Display
40W AC/DC Adapter (1.2m)
Power Cable (1.5m)
VGA Cable (1.5m)
USB2.0 Cable (1.8m)
Audio Cable (1.8m)
Quick Start Guide