


Key **Features**

- SuperClear® VA panel
- Full HD 1080p resolution
- 100Hz Variable refresh rate delivers fluid visuals
- 1ms (MPRT) response time for precision
- HDMI and VGA inputs for flexible connectivity



Product **Description**

The ViewSonic VA220-H is a 22" Full HD monitor featuring HDMI and VGA inputs for business and home use. The optimal screen performance and comfortable viewing without tearing or stuttering are delivered through variable refresh rate, and various ViewMode presets. Experience truly seamless on just one screen with a VESA-compatible mount at a low power consumption.

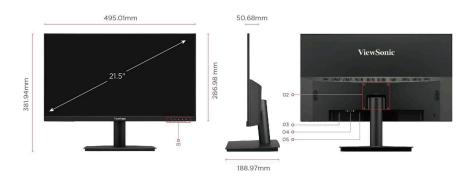

- 1. Menu Control Panel
- 2. VESA Compatible(Wall Mount
- 75x75mm)
- 3. HDMI 4. VGA
- 5. Power In



\mathbf{r}	ıs	D	. ,	١v	,
1)		Р		4 Y	

DISPLAY		
Display Size (in.):	22	
Viewable Area (in.):	21.5	
Panel Type:	VA Technology	
Resolution:	1920 x 1080	
Resolution Type:	FHD (Full HD)	
Static Contrast Ratio:	4,000:1 (typ)	
Dynamic Contrast Ratio:	50M:1	
Light Source:	LED	
Brightness:	250 cd/m² (typ)	
Colors:	16.7M	
Color Space Support:	8 bit true	
Aspect Ratio:	16:9	
Response Time (MPRT):	1ms	
Viewing Angles:	178° horizontal, 178° vertical	
Backlight Life (Hours):	30000 Hrs (Min)	
Curvature:	Flat	
Refresh Rate (Hz):	100	
Variable Refresh Rate Technology:	Yes	
Low Blue Light:	Software solution	
Flicker-Free:	Yes	
Color Gamut:	NTSC: 72% size (Typ) sRGB: 104% size (Typ)	
Pixel Size:	0.249 mm (H) x 0.241 mm (V)	
Surface Treatment:	Anti-Glare, Hard Coating (3H)	
COMPATIBILITY		
PC Resolution (max):	1920x1080	
Mac® Resolution (max):	1920x1080	
PC Operating System:	Windows 10/11 certified; macOS tested	
Mac® Resolution (min):	1920x1080	
CONNECTOR		
VGA:	1	
HDMI 1.4:	1	
Power in:	DC Socket (Center Positive)	
POWER		
Eco Mode (Conserve):	16W	
Eco Mode (optimized):	18W	
Consumption (typical):	20W	
Consumption (max):	22W	
Voltage:	AC 100-240V	
Stand-by:	0.3W	
Power Supply:	External Power Adaptor	
ADDITIONAL HARDWARE		

Kensington Lock Slot:

OPERATING CONDITIONS

OPERATING CONDITIONS					
Temperature:	32°F to 104°F (0°C to 40°C)				
Humidity (non-condensing):	20% to 90%				
WALL MOUNT					
VESA Compatible:	75 x 75 mm				
INPUT SIGNAL					
Frequency Horizontal:	RGB Analog: 24 ~ 86KHz, HDMI (v1.4): 30 ~ 120KHz				
Frequency Vertical:	RGB Analog: 48 ~ 75Hz, HDMI (v1.4): 48 ~ 100Hz				
VIDEO INPUT					
Digital Sync:	TMDS - HDMI (v1.4)				
Analog Sync:	Separate - RGB Analog				
ERGONOMICS					
Tilt (Forward/Back):	-3° / 15°				
WEIGHT (IMPERIAL)					
Net (lbs):	5.5				
Net Without Stand (lbs):	4.6				
Gross (lbs):	7.3				
WEIGHT (METRIC)					
Net (kg):	2.5				
Net Without Stand (kg):	2.1				
Gross (kg):	3.3				
DIMENSIONS (IMPERIAL) (WX	(HXD)				
Packaging (in.):	21.7 x 15 x 4.2				
Physical (in.):	19.49 x 15.04 x 7.44				
Physical Without Stand (in.):	19.49 x 11.3 x 2				
DIMENSIONS (METRIC) (WXH	XD)				
Packaging (mm):	550 x 382 x 106				
Physical (mm):	495.01 x 381.94 x 188.97				
Physical Without Stand (mm):	495.01 x 286.98 x 50.68				
GENERAL					
Regulations:	CE, CE EMC, CB, RoHS, ErP, REACH, WEEE, EAC, UkrSEPRO				
PACKAGE CONTENTS:	VA220-H x1, HDMI Cable (v1.4; Male-Male) x1, AC/DC Adapter x1, Quick Start Guide x1, Power plug x1 or 2 (by country) for VSE				
Recycle/Disposal:	Please dispose of in accordance with local, state or federal laws.				
Warranty:	*Warranty offered may differ from market to market				

CONTROLS

Key 1 (favorite), Key 2, Key 3, Key 4, Key 5 (power) Physical Controls:

Input Select, ViewMode, Color Adjust, Manual Image Adjust, Setup Menu On Screen Display:

Copyright © ViewSonic Corporation 2000-2024. All rights reserved.