



Breeze through everyday tasks

Dell 22 Monitor | SE2225H

Dell 24 Monitor | se2425H

Dell 27 Monitor | SE2725H

The world's # 1 monitor company*



Breeze through everyday tasks with these 21.5", 23.8" and 27" monitors certified by TÜV Rheinland for 3-star eye comfort.

Enjoy extended viewing with enhanced eye comfort

Enjoy visual well-being with ComfortView Plus, engineered to minimize harmful blue light exposure without sacrificing color accuracy. Coupled with a 75 Hz refresh rate, these monitors achieve TÜV Rheinland® 3-star eye comfort certification¹ — the latest industry standard for eye comfort to help reduce signs of eye fatigue.

Dependable from every angle

Contemporary design with slim bezels mean you see more with less distraction for better way to work or play.

Get superb clarity in FHD resolution with minimized reflections. These monitors offer a wide 178°/178° viewing angle and impressive 3000:1 contrast ratio, so you can view your work with consistent color and image quality.


Get organized between applications, emails and windows with the various predefined or custom window layouts using Dell Easy Arrange.²

Functional, space-saving design

Connect with ease with simple connectivity to most PCs, current or legacy, via HDMI or VGA. These monitors feature a small footprint and built-in power supply unit and cable holder to keep your space neat and organized. You can easily tilt the monitor to get just the right viewing angle or hook it up with a compatible VESA mount.

¹ TÜV Rheinland certified - Low Blue Light Hardware Solution and Flicker Free (ID 0217010014).

² Requires Dell Display Manager software installation.

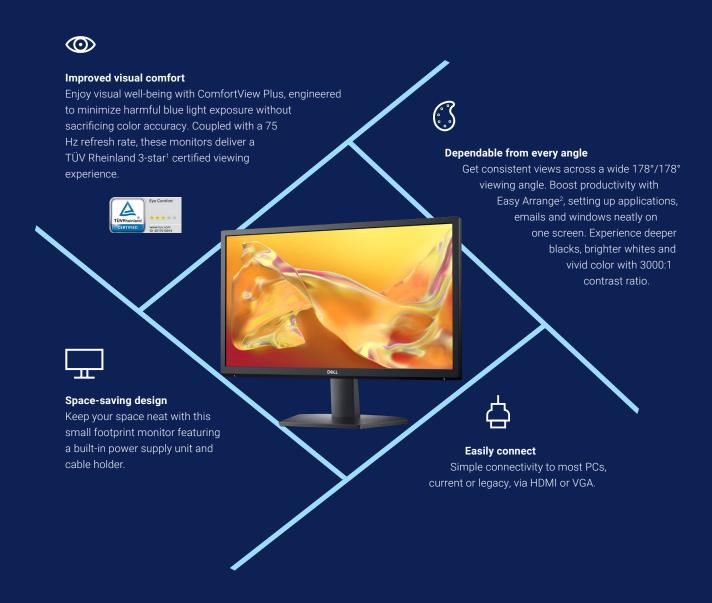

World's number 1 monitor company*

We deliver world-class monitors that have gone through rigorous development processes and stringent tests to ensure dependable performance. Get peace of mind with unmatched warranty and support options. Being environmentally forward in thinking, our monitors adhere to environment standards and are made with sustainable materials.

^{*} Dell monitors are #1 Worldwide for 10 years! Source: IDC Worldwide Quarterly PC Monitor Tracker, Q1 2024. From 2014 to 2023. CLM-011283

¹ TÜV Rheinland certified - Low Blue Light Hardware Solution and Flicker Free (ID 0217010014)

 $^{2\}quad \hbox{Requires Dell Display Manager software installation}.$

Designed for you

Contemporary design with slim bezels mean you see more with less distraction for better way to work or play.





Functional, space-saving design

A small footprint and built-in power supply unit and cable holder to keep your space neat. Easily tilt the monitor to get just the right viewing angle or hook it up with a compatible VESA mount.



Dell Display Manager

Stay organized between applications, emails and windows on one screen using Easy Arrange¹ and boost productivity while working from home.





Environmentally-forward thinking

Material innovation

Your monitor has been thoughtfully crafted with a selection of sustainable materials including 84% post-consumer recycled plastic and closed-loop ITE-derived plastic¹, and at least 20% recycled glass.² Using recycled materials helps conserve natural resources and contributes to a lower environmental footprint.

Low impact packaging

This monitor ships in a box made with 100% renewable content that is also recyclable.³

Energy conservation and environmental standards

This monitor is certified ENERGY STAR®4 meaning it meets high standards for energy efficiency.

Based on internal analysis, June 2024. Designed with 34.9% post-consumer recycled plastic and 49.9% closed-loop IT equipment derived plastic.

² Applicable to all new monitors launching in CY 2024. Recycled glass is present in monitor panel. Based on internal analysis, January 2024.

Applies to all Dell monitors launched since 2023. Made from FSC mix sources which is a mix of material from FSC certified forests, recycled content and/or FSC controlled wood. Based on internal analysis, August 2023.

Based on internal analysis, June 2024 .

Ports & Slots



- 1 Security lock slot¹
- **2** Power connector
- 3 HDMI
- 4 VGA

Cables included

- · Power cable
- HDMI cable



FEATURE MODEL	TECHNICAL SPECIFICATION Dell 22 Monitor - SE2225H	TECHNICAL SPECIFICATION Dell 24 Monitor - SE2425H	TECHNICAL SPECIFICATION Dell 27 Monitor - SE2725H
DIAGONAL VIEWING SIZE	544.85 mm (21.45 in.)	604.70 mm (23.81 in.)	685.99 mm (27.00 in.)
PANEL TYPE	Vertical Alignment Technology	Vertical Alignment Technology	Vertical Alignment (VA) Technology
MAXIMUM PRESET RESOLUTION AND REFRESH RATE	1920 x 1080 up to 75 Hz	1920 x 1080 up to 75 Hz	1920 x 1080 up to 75 Hz
VIEWING ANGLE	178° vertical 178° horizontal	178° vertical 178° horizontal	178° vertical 178° horizontal
PIXEL PITCH	0.2493 mm x 0.2410 mm	0.2745 mm x 0.2745 mm	0.3114 mm x 0.3114 mm
PIXEL PER INCH (PPI)	103	93	81
CONTRAST RATIO	3000:1 (typical)	3000:1 (typical)	3000:1 (typical)
ASPECT RATIO	16:9	16:9	16:9
BACKLIGHT TECHNOLOGY	LED Edgelight System	LED Edgelight System	LED Edgelight System
BRIGHTNESS	250 cd/m² (typical)	250 cd/m² (typical)	300 cd/m² (typical)
RESPONSE TIME	 5 milliseconds (gray to gray - fast mode) 8 milliseconds (gray to gray - normal mode) 	• 5 milliseconds (gray to gray - fast mode) • 8 milliseconds (gray to gray - normal mode)	• 5 milliseconds (gray to gray - fast mode) • 8 milliseconds (gray to gray - normal mode)
COLOR GAMUT	NTSC minimum 72% (CIE 1931), NTSC minimum 83% (CIE 1976)	NTSC minimum 72% (CIE 1931), NTSC minimum 83% (CIE 1976)	NTSC 72% (CIE 1931), NTSC 83% (CIE 1976)
COLOR DEPTH	16.7 Million colors	16.7 Million colors	16.70 Million colors
TÜV RHEINLAND EYE COMFORT	3-Stars	3-Stars	3-Stars
CONNECTIVITY	One HDMI (HDCP 1.4) (supports up to FHD 1920 x 1080 75Hz as per specified in HDMI 1.4) One VGA connector	One HDMI (HDCP 1.4) (supports up to FHD 1920 x 1080 75Hz as per specified in HDMI 1.4) One VGA connector	One HDMI port (HDCP 1.4) (Supports up to FHD 1920 x 1080, 75 Hz as per specified in HDMI 1.4) One VGA connector
ADJUSTABILITY	Tilt -5°/+21°	Tilt -5°/+21°	Tilt -5°/+21°
DISPLAY SCREEN COATING	Anti-glare with hard-coating 3H	Anti-glare with hard-coating 3H	Anti-glare with hard-coating 3H
DAISY CHAIN AVAILABILITY	Not Applicable	Not Applicable	Not Applicable
SOFTWARE COMPATIBILITY	Dell Display Manager (DDM) for Windows operating system	Dell Display Manager (DDM) for Windows operating system	Dell Display Manager (DDM) for Windows operating system
VOLTAGE REQUIRED	100 VAC to 240 VAC / 50 Hz or 60 Hz ± 3 Hz / 0.7 A (typical)	100 VAC to 240 VAC / 50 Hz or 60 Hz ± 3 Hz / 0.7 A (typical)	100 VAC to 240 VAC/50 Hz or 60 Hz ± 3 Hz/1.5 A
POWER CONSUMPTION	 0.3 W (Off mode)¹ 0.3 W (Standby mode)¹ 11.6 W (On mode)¹ 19 W (Max)² 11.9 W (Pon)³ 38.2 kWh (TEC)³ 	• 0.3 W (Off mode) ¹ • 0.3 W (Standby mode) ¹ • 14.3 W (On mode) ¹ • 22 W (Max) ² • 14.1 W (Pon) ³ • 45.0 kWh (TEC) ³	0.3 W (Off mode) 0.3 W (Standby Mode) 17 W (On Mode) 30 W (Maximum) 16 W (Pon) 50.76 kWh (TEC)
AUDIO OUTPUT	Not Applicable	Not Applicable	Not Applicable
HEIGHT WITH STAND	384.08 mm (15.12 in.)	420.26 mm (16.55 in.)	(Compressed ~ Extended): 459.21 mm (18.08 in.) - 459.21 mm (18.08 in.)
WIDTH WITH STAND	504.26 mm (19.85 in.)	552.64 mm (21.76 in.)	623.30 mm (24.54 in.)
DEPTH WITH STAND	178.81 mm (7.04 in.)	178.81 mm (7.04 in.)	199.87 mm (7.87 in.)
HEIGHT WITHOUT STAND	295.38 mm (11.63 in.)	331.61 mm (13.06 in.)	369.61 mm (14.55 in.)
WIDTH WITHOUT STAND	504.26 mm (19.85 in.)	552.64 mm (21.76 in.)	623.30 mm (24.54 in.)
DEPTH WITHOUT STAND	49.21 mm (1.94 in.)	49.26 mm (1.94 in.)	55.56 mm (2.19 in.)

¹ As defined in EU 2019/2021 and EU 2019/2013.

² Max brightness and contrast setting with maximum power loading on all USB ports.
3 Pon: Power consumption of On mode as defined in Energy Star 8.0 version. TEC: Total energy consumption in kWh as defined in Energy Star 8.0 version.

FEATURE	TECHNICAL SPECIFICATION	TECHNICAL SPECIFICATION	TECHNICAL SPECIFICATION
MODEL	Dell 22 Monitor - SE2225H	Dell 24 Monitor - SE2425H	Dell 27 Monitor - SE2725H
WEIGHT (WITH PACKAGING)	4.11 kg (9.06 lb)	4.70 kg (10.36 lb)	6.58 kg (14.51 lb)
WEIGHT (PANEL ONLY - FOR VESA MOUNT)	2.26 kg (4.98 lb)	2.80 kg (6.17 lb)	3.74 kg (8.25 lb)
WEIGHT WITH STAND ASSEMBLY AND CABLES	2.94 kg (6.98 lb)	3.46 kg (7.63 lb)	4.59 kg (10.12 lb)
FLAT PANEL MOUNT INTERFACE	VESA (100 mm x 100 mm)	VESA (100 mm x 100 mm)	VESA (100 mm x 100 mm)
SECURITY	Security lock slot (cable lock sold separately)	Security lock slot (cable lock sold separately)	Security lock slot (cable lock sold separately)
COMPLIANT STANDARDS	ENERGY STAR 8.0 ROHS Compliant Product Safety, EMC and Environmental Datasheets Dell Regulatory Compliance Home Page Dell and the Environment TÜV Rheinland Eye Comfort 3-Stars BFR/PVC reduce monitor. (The circuit boards are made from BFR/PVC-free laminates.) Meets NFPA 99 leakage current requirements. Arsenic-Free glass and Mercury-Free for the panel only.	ENERGY STAR 8.0 ROHS Compliant Product Safety, EMC and Environmental Datasheets Dell Regulatory Compliance Home Page Dell and the Environment TÜV Rheinland Eye Comfort 3-Stars BFR/PVC reduce monitor. (The circuit boards are made from BFR/PVC-free laminates.) Meets NFPA 99 leakage current requirements. Arsenic-Free glass and Mercury-Free for the panel only.	ENERGY STAR 8.0 ROHS Compliant Product Safety, EMC and Environmental Datasheets Dell Regulatory Compliance Home Page Dell and the Environment TÜV Rheinland Eye Comfort 3-Stars BFR/PVC reduce monitor (The circuit boards are made from BFR/PVC-free laminates) Meets NFPA 99 leakage current requirements. Arsenic-Free glass and Mercury-Free for the panel only.
TEMPERATURE RANGE	 Operating: 0°C to 40°C (32°F to 104°F) Non-operating: -20°C to 60°C (-4°F to 140°F) 	 Operating: 0°C to 40°C (32°F to 104°F) Non-operating: -20°C to 60°C (-4°F to 140°F) 	• Operating: 0°C to 40°C (32°F to 104°F) • Non-operating: -20°C to 60°C (-4°F to 140°F)
HUMIDITY RANGE	Operating: 10% to 80% (non-condensing)Non-Operating: 5% to 90% (non-condensing)	Operating: 10% to 80% (non-condensing)Non-Operating: 5% to 90% (non-condensing)	Operating: 10% to 80% (non-condensing)Non-Operating: 5% to 90% (non-condensing)
ALTITUDE	 Operating: 5,000 m (16,400 ft) maximum Non-operating: 12,191 m (40,000 ft) maximum 	 Operating: 5,000 m (16,400 ft) maximum Non-operating: 12,191 m (40,000 ft) maximum 	• Operating: 5,000 m (16,400 ft) maximum • Non-operating: 12,191 m (40,000 ft) maximum
WHAT'S INCLUDED	Monitor with stand Power cable One HDMI cable - 1.8 m Quick Start guide Safety Information	Monitor with stand Power cable One HDMI cable - 1.8 m Quick Start guide Safety Information	Monitor with stand Power cable One HDMI cable - 1.8 m Quick Start guide Safety Information
STANDARD SERVICE PLAN	(US/Canada) 1-year Advanced Exchange Service¹ (WW) 3-year Advanced Exchange Service¹	(US/Canada) 1-year Advanced Exchange Service¹ (WW) 3-year Advanced Exchange Service¹	(US/Canada) 1-year Advanced Exchange Service ¹ (WW) 3-year Advanced Exchange Service ¹

Technical specifications subject to change without prior notice. Product availability varies by country. Please contact your Dell representative for more information.

© 2024 Dell Inc. or its subsidiaries. All Rights Reserved. Dell Technologies, Dell, EMC, Dell EMC and other trademarks are trademarks of Dell Inc. or its subsidiaries. Other trademarks may be trademarks of their respective owners. USB Type-C* and USB-C* are registered trademarks of USB Implementers Forum. Thunderbolt and the Thunderbolt logo are trademarks of Intel Corporation in the U.S. and/or other countries.

¹ Advanced Exchange Service: Replacement part/unit dispatched, if needed, following completion of phone/online diagnosis. Fee charged for failure to return defective unit. Availability varies. Other conditions apply.